

DirectIP™ 4-channel Encoder

DE-1104

- Specialized in DirectIP™ NVR
- Supports PTZ with RS485 port
- Supports 4 audio input ports
- Supports quadruple stream
- Supports 4 analogue camera input ports


SPECIFICATIONS

ENCODER	
Video Compression	H.264
Video Input	4 BNC Composite
Max Video Resolution	D1 : 720x480 / 720x576 (NTSC / PAL) 960H : 960x480 / 960x576 (NTSC / PAL)
Frame Rate	30ips@960H (per channel)
Multi Streaming Video	Quadruple stream
Max.Network Throughput	48Mbps
Audio In / Out	4 RCA / -
PTZ Support	Yes (RS485)
Trigger Events	Motion detection, Video loss, Tempering
DirectIP Support	Yes
GENERAL	
Dimensions (W x H x D)	200mm x 44mm x 153mm (7.9" x 1.7" x 6.0")
Weight	0.84kg (1.85lbs)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
PoE(class)	Yes(IEEE 802.3af Class 3)
Power Input	12VDC, PoE
Power Consumption	10W
Approvals	FCC, CE



DIMENSIONS

(Unit - mm)

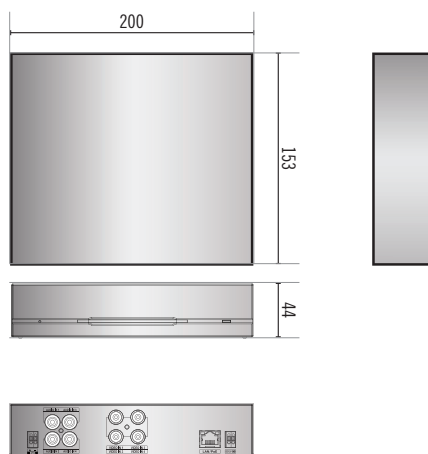

DirectIP™ 8-channel Encoder

DE-1108

- Specialized in DirectIP™ NVR
- Supports PTZ with RS485 port
- Supports 4 audio input ports
- Supports quadruple stream
- Supports 8 analogue camera input ports

SPECIFICATIONS

ENCODER	
Video Compression	H.264
Video Input	8 BNC Composite
Max Video Resolution	D1 : 720x480 / 720x576 (NTSC / PAL) 960H : 960x480 / 960x576 (NTSC / PAL)
Frame Rate	30ips@960H (per channel)
Multi Streaming Video	Quadruple stream
Max.Network Throughput	64Mbps
Audio In / Out	4 RCA / -
PTZ Support	Yes (RS485)
Trigger Events	Motion detection, Video loss, Tempering
DirectIP Support	Yes
GENERAL	
Dimensions (W x H x D)	200mm x 44mm x 153mm (7.9" x 1.7" x 6.0")
Weight	0.84kg (1.85lb)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
PoE(class)	Yes(IEEE 802.3af Class 3)
Power Input	12VDC, PoE
Power Consumption	10W
Approvals	FCC, CE



DIMENSIONS

(Unit - mm)

