

DR-8364(F)D

- Total incoming throughput 900Mbps
- Up to 1920ips UHD real-time recording
- Supports H.265 / H.264 codec
- Supports UHD display
- Up to 1920ips live display
- Easy to install, set-up, and play with DirectIP cameras
- Expandable up to 240TB using eSATA storage
- Supports RAID 1, 5, 10
- Supports Redundant Power
- Supports one click network configuration through FEN service
- Supports third party cameras (Axis, Panasonic, ONVIF)
- Establish NVR Failover system with standby DR-8364F(D)




SPECIFICATIONS

| VIDEO | |
|------------------------------------|---|
| Video Inputs | 64 IP Channels |
| Max. Incoming Throughput | 900Mbps |
| Supported Camera | DirectIP, Axis, Panasonic, ONVIF |
| Video Outputs | 1 HDMI, 1 VGA |
| Display Resolution | HDMI : 3840 x 2160, 1920 x 1200 , 1920 x 1080, 1680 x 1050, 1600 x 1200 VGA : 1920 x 1200 , 1920 x 1080, 1680 x 1050, 1600 x 1200 |
| Display Speed | Up to 1920ips |
| Digital Zoom | x2 ~ x12 |
| RECORDING | |
| Max. Throughput | 400Mbps, 1920ips @ UHD |
| Recording Resolution | Up to 12MP (Depending on IP Camera) |
| Compression | H.265, H.264 |
| Intelligent Codec | Supported |
| Recording Mode | Time-lapse, Event, Pre-event, Panic |
| Trigger Events | Alarm In, Audio Detection, Motion Detection, Trip-zone, Tampering, Video Loss, Text-in, ANPR, Etc. |
| PLAYBACK | |
| Performance | 16ch Full HD Synchronous Playback 4ch 4K Playback |
| Search Mode | Time-lapse, Event Log, Thumbnail, Motion, Text-in |
| Digital Zoom | x2 ~ x12 |
| STORAGE | |
| HDD | SATA x8, eSATA x4, RAID 1, 5, 10 supported |
| NETWORK | |
| Client Connection | Gigabit Ethernet (Client) x 1 |
| Video In Connection | Gigabit Ethernet (Video In) x 3, SFP (Video In) x 2 |
| Transmission Speed | 400Mbps / 500Mbps (BRP Mode) |
| Camera Power | - |
| Remote Data Export | IDIS Player, AVI, JPG |
| Event Notification | Email (Attach Clip (.cbf) .MP4), Callback to Remote S/W, Push Notification (IDIS Mobile) |
| Two-way Audio | Yes |
| Client Viewer | IDIS Center, IDIS Mobile, IDIS Web, IDIS Solution Suite |
| INTERFACE | |
| Audio In / Out | Local (NVR) : 1 RCA / 1 RCA + 1 HDMI IP Camera : 64 / 64 (Depending on IP Camera) |
| Alarm In / Out | Local (NVR) : 4 / 1 IP Camera : 64 / 64 (Depending on IP Camera) |
| Alarm Reset In | 1 |
| Serial Interface | RS232 (Terminal Block), RS485 (Terminal Block) |
| USB | USB 2.0 x 2, USB 3.0 x 1 |
| User Interface | Mouse, IR Remote Control, Network Remote Keyboard, Front Button (Panic) |
| GENERAL | |
| Operating System | Embedded Linux |
| Unit Dimensions (W x H x D) | 482.6 mm x 88 mm x 523.3 mm (19" x 3.5" x 20.6") |
| Unit Weight | 12.3 kg (27.12 lb) (With 2 HDDs) |
| Working Temperature | 0°C to 40°C (32°F ~ 104°F) |
| Operating Humidity | 0% ~ 90% |
| Power Input | AC 100-240 V, 50/60Hz, 2.0 - 1.0A (REDUNDANT SMPS) |
| Power Consumption | 100-240V~, 50/60Hz, 2.0-1.0A, 120W x2 |
| Approvals | FCC, UL, CE, CB, KC, PSE |

DIMENSIONS



(Unit - mm)

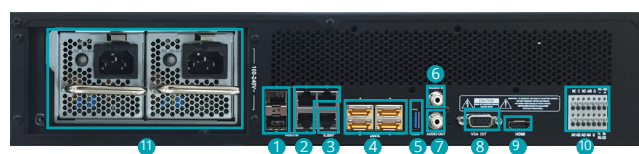

- ① Video In SFP Slots
- ② Video In RJ45
- ③ Network Port
- ④ eSATA Ports
- ⑤ USB 3.0
- ⑥ Audio In
- ⑦ Audio Out
- ⑧ VGA Out Port
- ⑨ HDMI
- ⑩ Alarm Connection
- ⑪ Ports Power In Port

ACCESSORIES (OPTIONAL)



DH-2212PF



DA-ES1104

* Maximum HDD capacity will be updated as new HDD models become available.
For the most recent information, please check http://designtool.idisglobal.com/design_tool/product_compatibility.php