

# DV-2116

NEW




- AI in the BOX with IDIS Solution Suite
- Compatible with IDIS Deep-Learning Analytics (IDLA)
- Analytics available with ISS IDLA up to 16 IP cameras
- 4U rack mount chassis

## IDIS Deep Learning Analytics (IDLA)

Powered by the IDIS Deep Learning Engine

- Superior Accuracy deep-learning engine
- Object classification suitable for CCTV application
- Simple configuration and no calibration needed

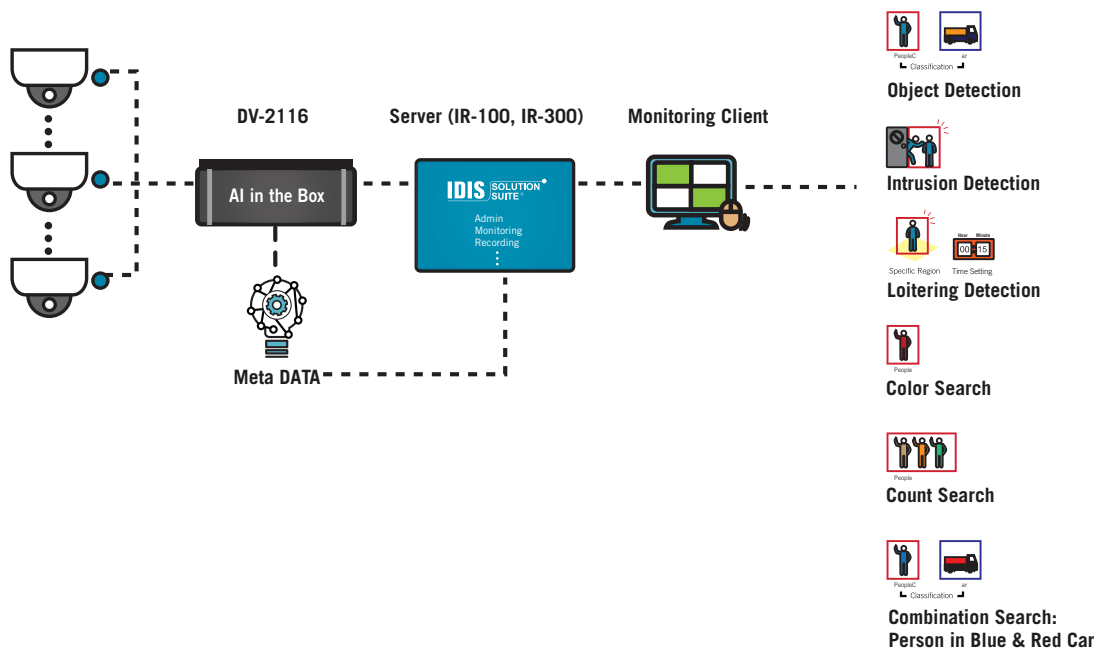

## SPECIFICATIONS

DV-2116		
SYSTEM	IDIS Solution Suite	Compatible with IDLA VA Service Version 3.0.0 or Higher
	Network Connection	2 GbE RJ-45 Ports (1000Base-T)
	Channels available for Analytics	16Ch
	IDLA Processing Unit	NVIDIA GTX1060, 6GB
	Operating System	Microsoft® Windows Embedded Standard 8
	Processor	Intel® I7-7700, 3.6GHz
	Memory	DDR4 PC-19200, 8GB
	Video Outputs	1 HDMI, 1 DP, 1 VGA
	USB	6 ( 2 Front USB 2.0 + 2 Back USB 3.0 + 2 Back USB 2.0)
MECHANICAL	Form Factor	4U RACK Mount Chassis
	Dimensions (W x D x H)	440mm x 177mm x 462mm (17.3" x 7.0" x 18.2")
	Shipping Dimensions (W x D x H)	590mm x 350mm x 700mm (23.2" x 13.7" x 27.6")
	Weight	30.9 lbs. (14.0kg)
ELECTRICAL	Power Input	AC 100-240 V, 50/60Hz, 3.0 - 1.5A
	Power Supply	Single Power
	Power Consumption	250W
ENVIRONMENTAL	Operating Temperature	0° to 40°C (32° to 104°F)
	Operating Humidity	0% to 90%
ACCESSORIES SUPPLIED	Power Cord	1
GENERAL	Certifications	FCC, CE, CB, UL, KC

## DIMENSIONS

