

# SM-F211

- FHD resolution (1920 x 1080)
- HDMI / VGA / BNC (2x in - 1x out)
- Commercial grade "A" panel builtt
- High performance image processing circuit
- Power & source recovery
- Auto source switching
- Picture-in-Picture
- Lifetime up to 50,000 hours
- Viewing angle 170°




## SPECIFICATIONS

Panel	
Screen Size	21.5 Inch
Active Display Area	476.64(H) x 268.11(V) mm
Max. Resolution	1920 x 1080 @ 60Hz
Panel Technology	TN LCD Panel
Pixel Pitch	0.24825 mm x 0.24825 mm
Brightness	250 cd/m2
Contrast Ratio	1000 : 1
Aspect Ratio	16:9
Viewing Angle (H/V)	170° / 160°
Display Color	16.7 Million
Response Time	<5ms
Refresh Rate	60Hz
Interface	
HDMI in	1
VGA in	1
BNC in	2
BNC out	1
Audio Input	1 (3.5 Stereo Jack)
Audio Output	no
RS232	no
Transmitter	
Remote Control	no
Audio	
Built-in Speakers	Yes (2W x 2)
Feature	
Power Savings (DPMS)	Yes
Anti-glare	Yes
General	
Outline Dimensions (W x H x D)	515.1mm x 371.1mm x 45.0mm 20.28" x 14.61" x 1.77"
Net Weight	3.67 kg (8.1 lbs)
Material / Color	Plastic / Black
Warranty - Parts / Labor	3 year / 3 year
MTBF	50,000 Hours
Power Supply	DC 12V, 2.1A (AC 100 ~ 240V 50/60Hz)
Power Consumption	25.2W
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Mount	
VESA Mount Size	100mm x 100mm / M4 x 10 Screw

## DIMENSIONS

(Unit - mm)

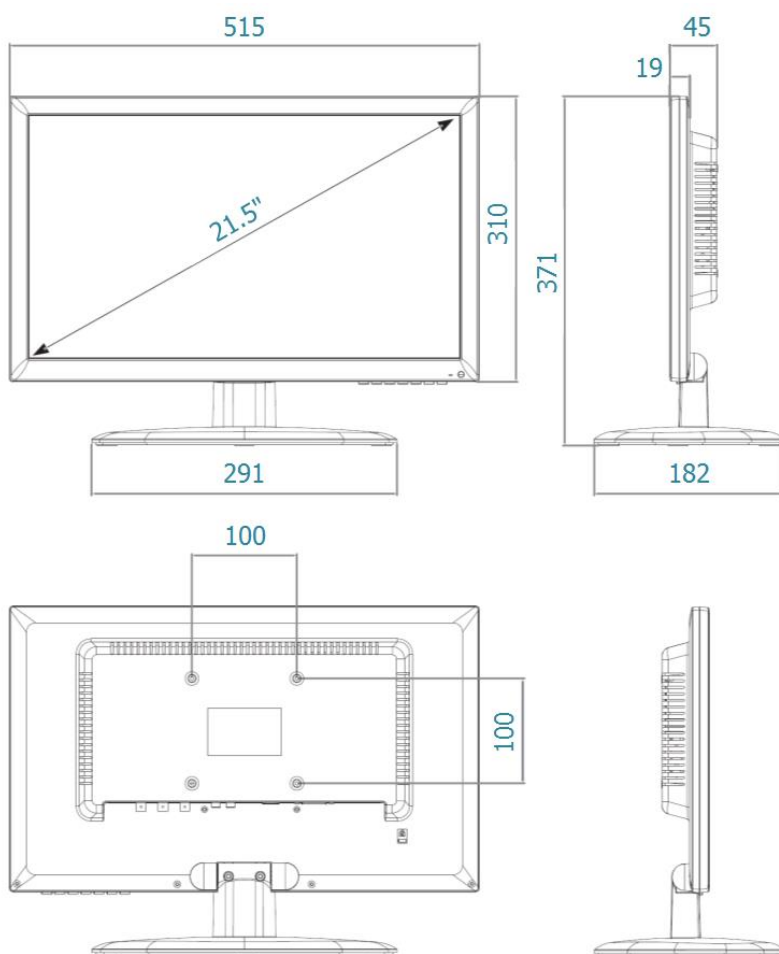

## PRODUCT IMAGES

