

DC-D4531WERX



- Onvif Protocol
- 5MP (2592 x 1944) Resolution
- Motorized Vari-focal(f = 2.7 - 12 mm)
- PoE (IEEE 802.3af Class 3)
- micro SD / SDHC / SDXC
- Audio In / Out
- Day and Night (ICR)
- True Wide Dynamic Range (WDR)




SPECIFICATIONS


VIDEO	
Image Sensor	1/2.7" CMOS
Max. Resolution	2592 x 1944
Scanning Mode	Progressive Scan
Lens Type	Motorized Vari-focal
Focal Length	f = 2.7 - 12 mm
Aperture	F 1.83 (Wide) ~ 3.32 (Tele)
Iris Control	DC IRIS
Angular Field of View Wide	99°(H), 72°(V), 131°(D)
Min. Illumination	Color 0.05Lux @ F1.2 (AGC On) B/W 0 Lux @ IR On
Dynamic Range	120dB, True WDR
Electronic Shutter Speed	1/5 ~ 1/20000s, Anti-Flicker, Slow Shutter (1~1/5, 1/7.5, 1/15)
Day and Night	IR Cut Filter with Auto Switch
IR Distance (LEDs)	45 m (4 ea)
Pan/Tilt Range	Bracket: Pan 0-360°; Lens: Pan 0-360°, Tilt: 0-80°
NETWORK	
Video Compression	H.265, H.264 (MP)
Bit rate Control	CBR / VBR
Max. Frame Rate	30fps : 2592x1944 (WDR)
Audio Compression	G711A (G.711 a-Law), G711U (G.711 u-Law), ADPCM 16K, G726
Supported Resolution	2592 x 1944, 2592 x 1520, 2304 x 1296, 1920 x 1080, 1280 x 960, 1280 x 720
Multi-Video Streaming	Triple
Ethernet	RJ45(10/100BASE-T)
Edge Storage (Optional)	Micro SD/SDHC/SDXC memory card (class 6 or higher, max. 256GB)
Audio and Alarm	
Audio In/Out	RCA 1ea / RCA 1ea
Alarm In	1 Switch Input
Alarm Out	0.5 A at 125 VAC / 2A at 30 VDC
ENVIRONMENTAL	
Operating Temperature	-30°C ~ +55°C (-22°F ~ +131°F)
Operating Humidity	0% ~ 90%
ELECTRICAL	
Power Source	DC 12 V, POE (IEEE 802.3af Class 3)
Power Consumption	Max. 9 W
Approvals	FCC, CE, IP66
MECHANICAL	
Dimensions	Ø135.6 mm x 127 mm (Ø5.3" x 4.95")
Weight	0.84 kg (1.85 lb)

DIMENSIONS

(Unit - mm)

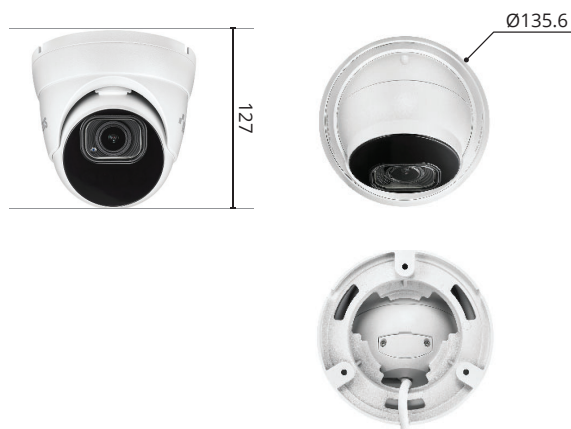

ACCESSORIES (OPTIONAL)

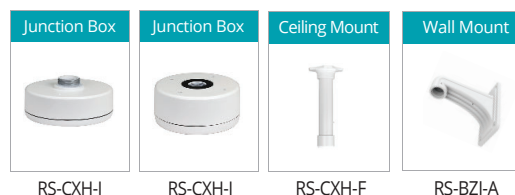

ACCESSORIES CONFIGURATION TREE

